

SANYO**LB1656****2-Phase Stepping Motor Driver****Overview**

The LB1656 is a dual bridge driver IC suited for use in 2-phase bipolar stepping motor driver for FDD (3 to 5.25 inches) head actuator. The maximum driver current×voltage is 0.33A×12V/bridge.

Features

- Power save function.
- $\phi 1$, $\phi 2$ direction inputs are used to make driver output selection.
- Low saturation voltage.
- Low current drain.
- Direct controllable from MPU due to low input current.
- Input level : TTL, LSTTL, 5V CMOS compatible.
- On-chip thermal shutdown (TSD) circuit.

Specifications**Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$**


Parameter	Symbol	Conditions	Ratings	Unit
Logic section supply voltage	V_{CC}		7	V
Seeking supply voltage	V_{S1}		15	V
Holding supply voltage	V_{S2}		7	V
Input voltage	V_{IN}		0 to V_{CC}	V
Peak seeking current	$I_{O\ peak}$	$t \leq 5\text{ms}$	500	mA
Continuous seeking current	I_{OS}		330	mA
Holding current	I_{OH}		200	mA
Allowable power dissipation	$P_{d\ max}$		1.9	W
Operating temperature	T_{opr}		-20 to 70	$^\circ\text{C}$
Storage temperature	T_{stg}		-55 to +125	$^\circ\text{C}$

Allowable Operating Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Logic section supply voltage	V_{CC}		4.5	5.0	5.5	V
Seeking supply voltage	V_{S1}		10.2	12.0	13.8	V
Holding supply voltage	V_{S2}		4.5	5.0	5.5	V

Package Dimensions

unit:mm

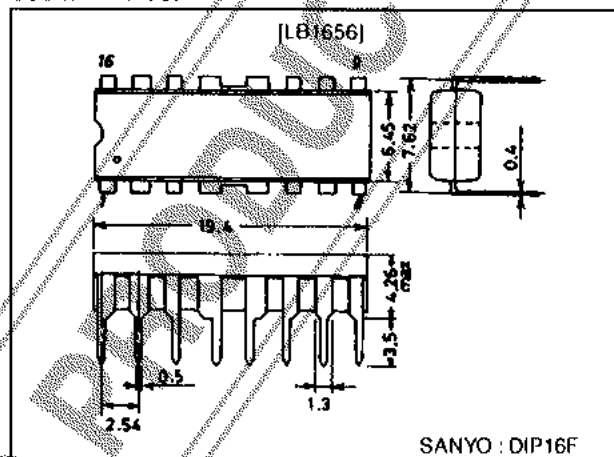3054A-DIP16F


LB1656

Electrical Conditions at $T_a = 25^\circ\text{C}$, $V_{CC}=25^\circ\text{C}$, $V_{CC}=5\text{V}$, $V_{CC1}=12\text{V}$, $V_{S2}=5\text{V}$

Parameter	Symbol	Conditions	Ratings			Unit	
			min	typ	max		
Input low-level voltage	V_{IL}				0.8	V	
Input high-level voltage	V_{IH}		2.0			V	
Input low-level current	I_{IL}	$V_I=0.8\text{V}$	-10		+10	μA	
Input high-level current	I_{IH}	$V_I=2\text{V}$		2	10	μA	
		$V_I=5\text{V}$		0.3	1.0	mA	
Current drain	I_{CC}	$ps=0.8\text{V}$, V_{CC}		25	33	mA	
		$ps=0.8\text{V}$, V_{S1} , Note1		6	10	mA	
		$ps=0.8\text{V}$, V_{S2} , Note2			0.1		mA
		$ps=2\text{V}$, V_{CC}		25	33	mA	
		$ps=2\text{V}$, V_{S1} , Note1			1	2	mA
		$ps=2\text{V}$, V_{S2} , Note2			2.5	4	mA
Output transistor voltage	$V_{(BR)CER}$	$I_C=10\text{mA}$	18			V	
V_{S1} saturation voltage	$V_{CE(sat)1}$	$ps=0.8\text{V}$, $I_O=330\text{mA}$, Note3		1.5	2.0	V	
V_{S2} saturation voltage	$V_{CE(sat)2}$	$ps=2.0\text{V}$, $I_O=130\text{mA}$, Note3		1.5	2.0	V	
Clamp voltage	V_F	$I_F=330\text{mA}$, upper		3		V	
		$I_F=330\text{mA}$, lower		1.5		V	
Delay time	I_{PLH}			4		μs	
	I_{PHL}			2		μs	
TSD operating temperature	TSD			150		$^\circ\text{C}$	
TSD hysteresis	ΔT			25		$^\circ\text{C}$	

- Note : 1. Measure sum of currents at pins 9 and 16.
 2. Measure sum of currents at pins 1 and 8.
 3. Measure sum of saturation voltages at upper and lower level.


Equivalent Circuit Block Diagram

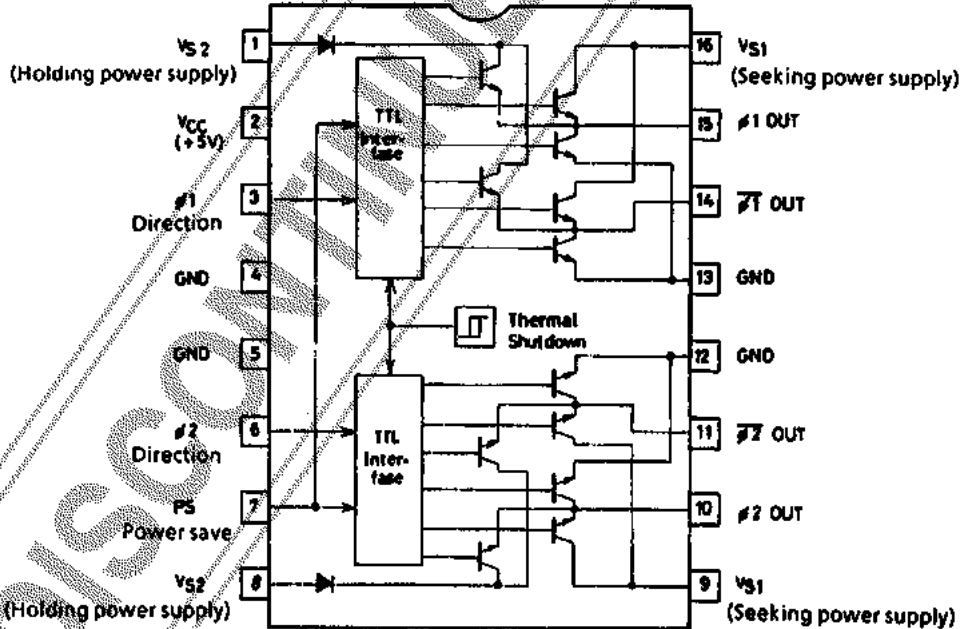


The #1, #2 direction inputs are used to make driver output selection and the power save input is used to select the driver source output from between 5V supply and 12V supply.

LB1656

Sample Application Circuit : 2-phase bipolar stepping motor driver.

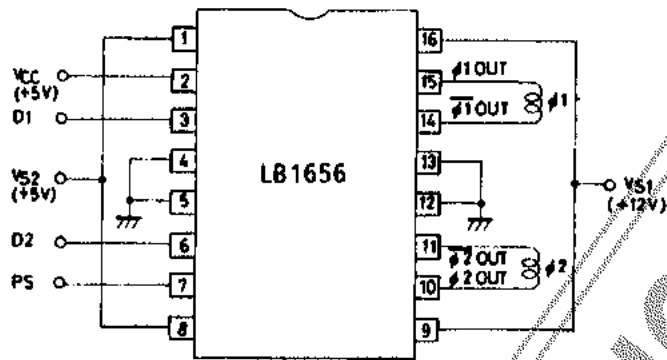

Timing Chart

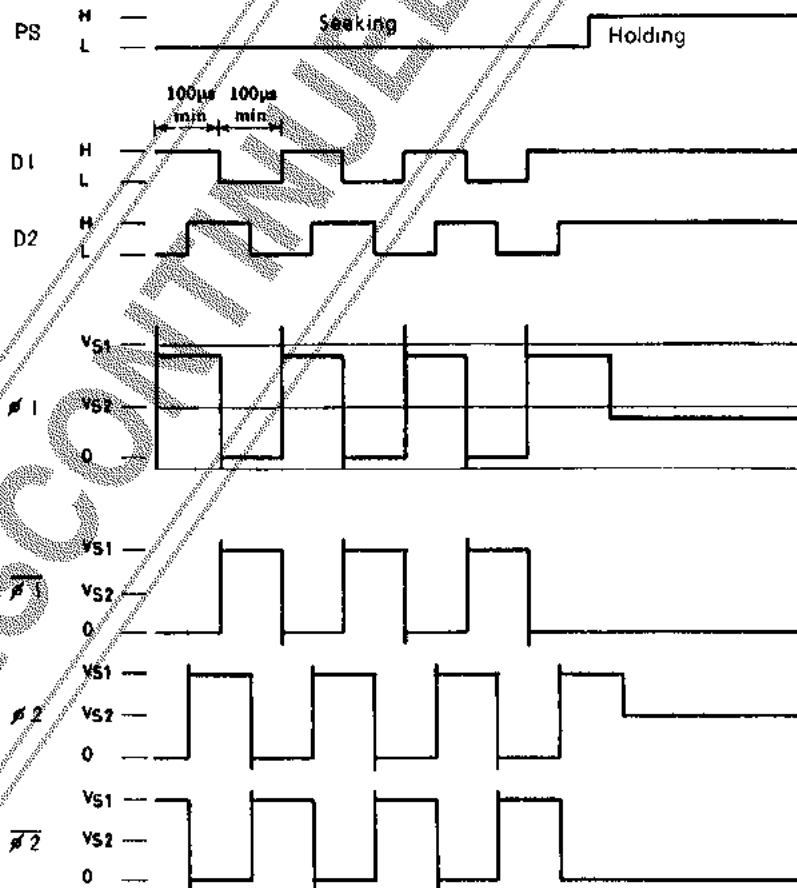

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.