

TL1431 PRECISION PROGRAMMABLE REFERENCE


SLVS062H – DECEMBER 1991 – REVISED JANUARY 2002

- 0.4% Initial Voltage Tolerance
- 0.2-Ω Typical Output Impedance
- Fast Turnon . . . 500 ns
- Sink Current Capability . . . 1 mA to 100 mA
- Low Reference Current (REF)
- Adjustable Output Voltage . . . $V_{I(\text{ref})}$ to 36 V



description

The TL1431 is a precision programmable reference with specified thermal stability over automotive, commercial, and military temperature ranges. The output voltage can be set to any value between $V_{I(\text{ref})}$ (approximately 2.5 V) and 36 V with two external resistors (see Figure 16). This device has a typical output impedance of 0.2 Ω. Active output circuitry provides a very sharp turnon characteristic, making the device an excellent replacement for zener diodes and other types of references in applications such as onboard regulation, adjustable power supplies, and switching power supplies.



The TL1431C is characterized for operation over the commercial temperature range of 0°C to 70°C. The TL1431Q is characterized for operation over the full automotive temperature range of -40°C to 125°C. The TL1431M is characterized for operation over the full military temperature range of -55°C to 125°C.

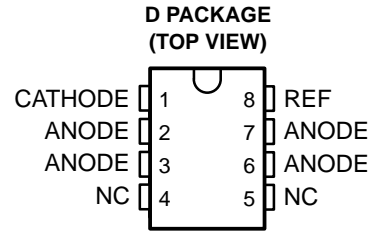

NC – No internal connection
ANODE terminals are connected internally.

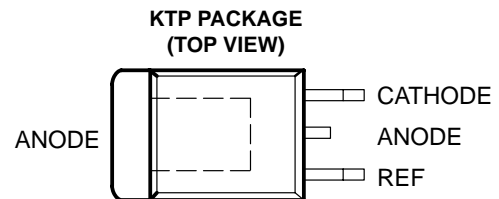

The ANODE terminal is in electrical contact with the mounting base.

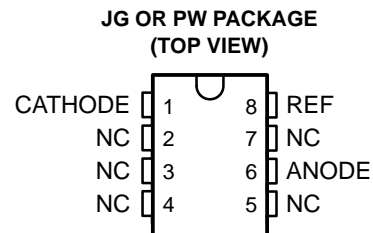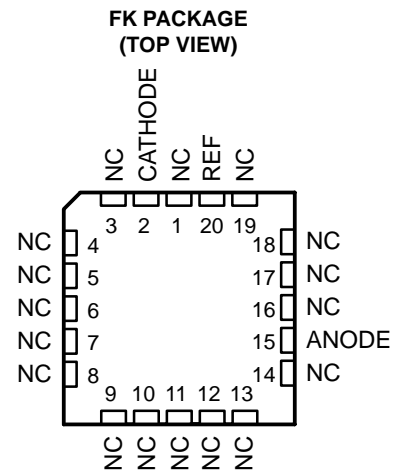

NC – No internal connection



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2002, Texas Instruments Incorporated
On products compliant to MIL-PRF-38535, all parameters are tested unless otherwise noted. On all other products, production processing does not necessarily include testing of all parameters.

TL1431 PRECISION PROGRAMMABLE REFERENCE


SLVS062H – DECEMBER 1991 – REVISED JANUARY 2002

AVAILABLE OPTIONS


| T _A | PACKAGED DEVICES | | | | | |
|----------------|-------------------|------------------------------|---------------|--------------------------------|-------------------|------------------|
| | SMALL OUTLINE (D) | PLASTIC FLANGE MOUNTED (KTP) | TO-226AA (LP) | THIN SHRINK SMALL OUTLINE (PW) | CHIP CARRIER (FK) | CERAMIC DIP (JG) |
| 0°C to 70°C | TL1431CD | TL1431CKTPR | TL1431CLP | TL1431CPW | – | – |
| –40°C to 125°C | TL1431QD | – | TL1431QLP | – | – | – |
| –55°C to 125°C | – | – | – | – | TL1431MFK | TL1431MJG |

The D and LP packages are available taped and reeled. Add the suffix R to the device type (e.g., TL1431CDR). The KTP and PW packages are only available taped and reeled.


symbol



functional block diagram

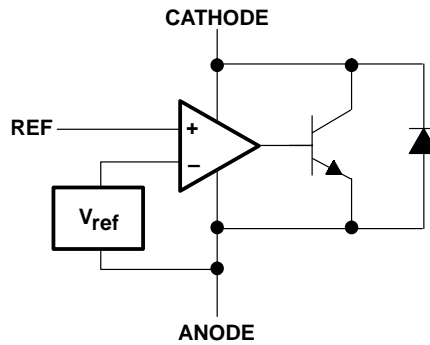

equivalent schematic†

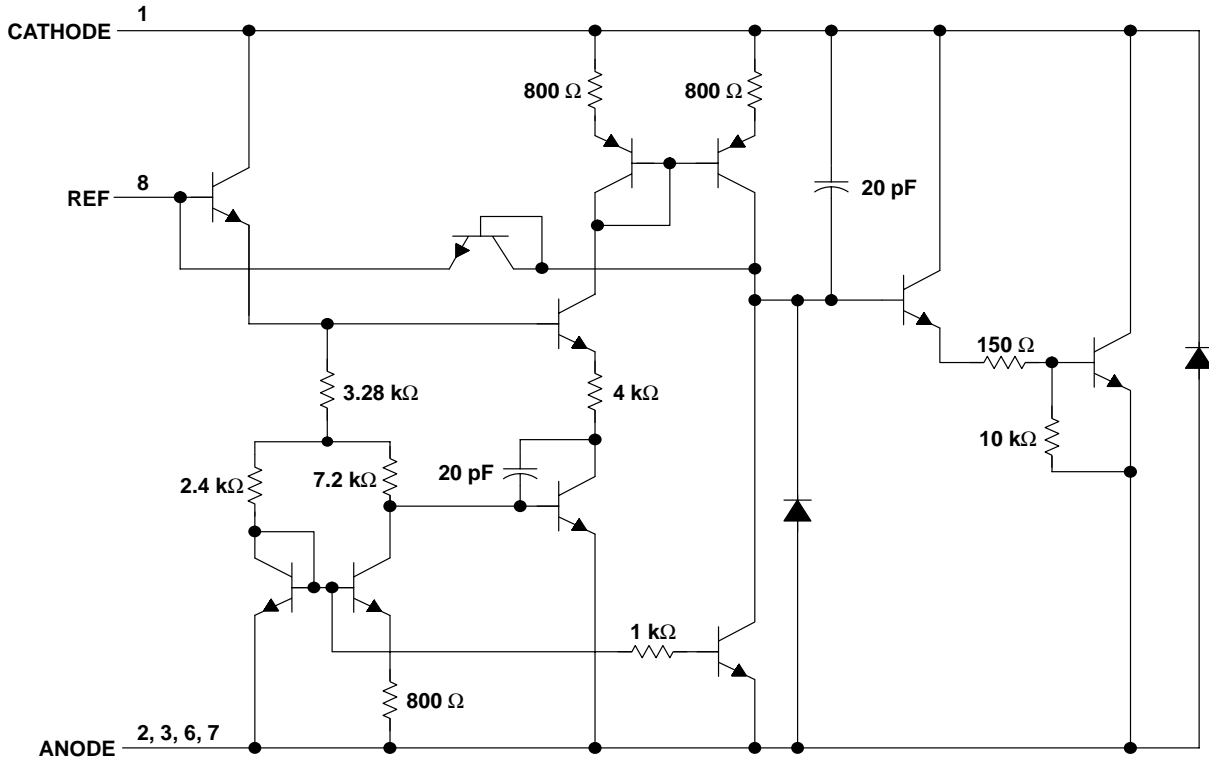

† All component values are nominal.
Pin numbers shown are for the D package.

TL1431 PRECISION PROGRAMMABLE REFERENCE

SLVS062H – DECEMBER 1991 – REVISED JANUARY 2002

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

| | |
|---|----------------------|
| Cathode voltage, V_{KA} (see Note 1) | 37 V |
| Continuous cathode current range, I_{KA} | –100 mA to 150 mA |
| Reference input current range, $I_{I(ref)}$ | –50 μ A to 10 mA |
| Package thermal impedance, θ_{JA} (see Notes 2 and 4): D package | 97°C/W |
| (see Notes 2 and 3): KTP package | 28°C/W |
| (see Notes 2 and 4): LP package | 156°C/W |
| (see Notes 2 and 4): PW package | 149°C/W |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds | 260°C |
| Storage temperature range, T_{stg} | –65°C to 150°C |

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied.

Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES:
1. All voltage values are with respect to ANODE, unless otherwise noted.
 2. Maximum power dissipation is a function of $T_J(max)$, θ_{JA} , and T_A . The maximum allowable power dissipation at any allowable ambient temperature is $P_D = (T_J(max) - T_A)/\theta_{JA}$. Operating at the absolute maximum T_J of 150°C can affect reliability.
 3. The package thermal impedance is calculated in accordance with JESD 51-5.
 4. The package thermal impedance is calculated in accordance with JESD 51-7.

POWER DISSIPATION RATING TABLE – FREE-AIR TEMPERATURE

| PACKAGE | $T_A = 25^\circ\text{C}$ POWER RATING | DERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$ POWER RATING | $T_A = 85^\circ\text{C}$ POWER RATING | $T_A = 125^\circ\text{C}$ POWER RATING |
|---------|--|--|--|--|---|
| FK | 1375 mW | 11.0 mW/°C | 880 mW | 715 mW | 275 mW |
| JG | 1050 mW | 8.4 mW/°C | 672 mW | 546 mW | 210 mW |

recommended operating conditions

| | | MIN | MAX | UNIT |
|----------|--------------------------------|--------------|-----|------|
| V_{KA} | Cathode voltage | $V_{I(ref)}$ | 36 | V |
| I_{KA} | Cathode current | 1 | 100 | mA |
| T_A | Operating free-air temperature | TL1431C | 0 | 70 |
| | | TL1431Q | –40 | 125 |
| | | TL1431M | –55 | 125 |



electrical characteristics at specified free-air temperature, $I_{KA} = 10 \text{ mA}$ (unless otherwise noted)

| PARAMETER | TEST CONDITIONS | T_A † | TEST CIRCUIT | TL1431C | | | UNIT |
|--|--|--------------------|--------------|--------------|------|--------------|---------------|
| | | | | MIN | TYP | MAX | |
| $V_{I(\text{ref})}$ Reference input voltage | $V_{KA} = V_{I(\text{ref})}$ | 25°C Full range | Figure 1 | 2490 2480 | 2500 | 2510 2520 | mV |
| $V_{I(\text{dev})}$ Deviation of reference input voltage over full temperature range‡ | $V_{KA} = V_{I(\text{ref})}$ | Full range | Figure 1 | | 4 | 20 | mV |
| $\frac{\Delta V_{I(\text{ref})}}{\Delta V_{KA}}$ Ratio of change in reference input voltage to the change in cathode voltage | $\Delta V_{KA} = 3 \text{ V to } 36 \text{ V}$ | Full range | Figure 2 | | -1.1 | -2 | mV/V |
| $I_{I(\text{ref})}$ Reference input current | $R1 = 10 \text{ k}\Omega, R2 = \infty$ | 25°C Full range | Figure 2 | | 1.5 | 2.5 3 | μA |
| $I_{I(\text{dev})}$ Deviation of reference input current over full temperature range‡ | $R1 = 10 \text{ k}\Omega, R2 = \infty$ | Full range | Figure 2 | | 0.2 | 1.2 | μA |
| I_{min} Minimum cathode current for regulation | $V_{KA} = V_{I(\text{ref})}$ | 25°C | Figure 1 | | 0.45 | 1 | mA |
| I_{off} Off-state cathode current | $V_{KA} = 36 \text{ V}, V_{I(\text{ref})} = 0$ | 25°C Full range | Figure 3 | | 0.18 | 0.5 2 | μA |
| $ z_{KA} $ Output impedance§ | $V_{KA} = V_{I(\text{ref})}, f \leq 1 \text{ kHz}, I_{KA} = 1 \text{ mA to } 100 \text{ mA}$ | 25°C | Figure 1 | | 0.2 | 0.4 | Ω |


† Full range is 0°C to 70°C for C-suffix devices.

‡ The deviation parameters $V_{I(\text{dev})}$ and $I_{I(\text{dev})}$ are defined as the differences between the maximum and minimum values obtained over the rated temperature range. The average full-range temperature coefficient of the reference input voltage $\alpha_{V_{I(\text{ref})}}$ is defined as:

$$\left| \alpha_{V_{I(\text{ref})}} \right| \left(\frac{\text{ppm}}{^\circ\text{C}} \right) = \frac{\left(\frac{V_{I(\text{dev})}}{V_{I(\text{ref}) \text{ at } 25^\circ\text{C}}} \right) \times 10^6}{\Delta T_A}$$

where:

ΔT_A is the rated operating temperature range of the device.

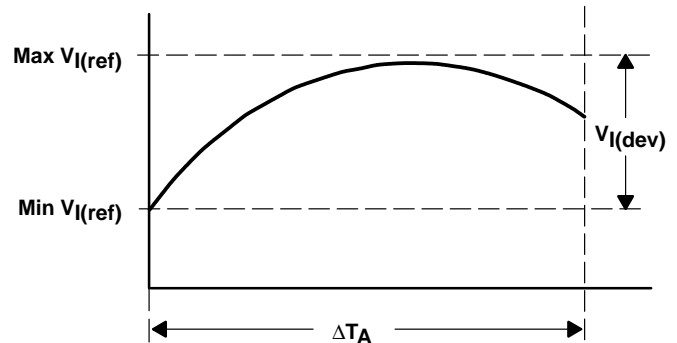

$\alpha_{V_{I(\text{ref})}}$ is positive or negative, depending on whether minimum $V_{I(\text{ref})}$ or maximum $V_{I(\text{ref})}$, respectively, occurs at the lower temperature.

§ The output impedance is defined as: $|z_{KA}| = \frac{\Delta V_{KA}}{\Delta I_{KA}}$

When the device is operating with two external resistors (see Figure 2), the total dynamic impedance of the circuit is given by: $|z'| = \frac{\Delta V}{\Delta I}$,

which is approximately equal to $|z_{KA}| \left(1 + \frac{R1}{R2} \right)$.

TL1431 PRECISION PROGRAMMABLE REFERENCE

SLVS062H – DECEMBER 1991 – REVISED JANUARY 2002

electrical characteristics at specified free-air temperature, $I_{KA} = 10 \text{ mA}$ (unless otherwise noted)

| PARAMETER | TEST CONDITIONS | T_A † | TEST CIRCUIT | TL1431Q | | | TL1431M | | | UNIT |
|---|--|------------|--------------|---------|------|------|---------|------|------|---------------|
| | | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| $V_{I(\text{ref})}$ Reference input voltage | $V_{KA} = V_{I(\text{ref})}$ | 25°C | Figure 1 | 2490 | 2500 | 2510 | 2475 | 2500 | 2540 | mV |
| | | Full range | | 2470 | | 2530 | 2460 | | 2550 | |
| $V_{I(\text{dev})}$ Deviation of reference input voltage over full temperature range‡ | $V_{KA} = V_{I(\text{ref})}$ | Full range | Figure 1 | | 17 | 55 | | 17 | 55* | mV |
| $\frac{\Delta V_{I(\text{ref})}}{\Delta V_{KA}}$ Ratio of change in reference input voltage to the change in cathode voltage | $\Delta V_{KA} = 3 \text{ V to } 36 \text{ V}$ | Full range | Figure 2 | | -1.1 | -2 | | -1.1 | -2 | mV/V |
| $I_{I(\text{ref})}$ Reference input current | $R1 = 10 \text{ k}\Omega, R2 = \infty$ | 25°C | Figure 2 | | 1.5 | 2.5 | | 1.5 | 2.5 | μA |
| | | Full range | | | | 4 | | | 5 | |
| $I_{I(\text{dev})}$ Deviation of reference input current over full temperature range‡ | $R1 = 10 \text{ k}\Omega, R2 = \infty$ | Full range | Figure 2 | | 0.5 | 2 | | 0.5 | 3* | μA |
| I_{min} Minimum cathode current for regulation | $V_{KA} = V_{I(\text{ref})}$ | 25°C | Figure 1 | | 0.45 | 1 | | 0.45 | 1 | mA |
| I_{off} Off-state cathode current | $V_{KA} = 36 \text{ V}, V_{I(\text{ref})} = 0$ | 25°C | Figure 3 | | 0.18 | 0.5 | | 0.18 | 0.5 | μA |
| | | Full range | | | | 2 | | | 2 | |
| $ z_{KA} $ Output impedance§ | $V_{KA} = V_{I(\text{ref})}, f \leq 1 \text{ kHz}, I_{KA} = 1 \text{ mA to } 100 \text{ mA}$ | 25°C | Figure 1 | | 0.2 | 0.4 | | 0.2 | 0.4 | Ω |

*On products compliant to MIL-PRF-38535, this parameter is not production tested.


† Full range is -40°C to 125°C for Q-suffix devices, and -55°C to 125°C for M-suffix devices.

‡ The deviation parameters $V_{I(\text{dev})}$ and $I_{I(\text{dev})}$ are defined as the differences between the maximum and minimum values obtained over the rated temperature range. The average full-range temperature coefficient of the reference input voltage $\alpha_{V_{I(\text{ref})}}$ is defined as:

$$|\alpha_{V_{I(\text{ref})}}| \left(\frac{\text{ppm}}{^\circ\text{C}} \right) = \frac{\left(\frac{V_{I(\text{dev})}}{V_{I(\text{ref}) \text{ at } 25^\circ\text{C}}} \right) \times 10^6}{\Delta T_A}$$

where:

ΔT_A is the rated operating temperature range of the device.

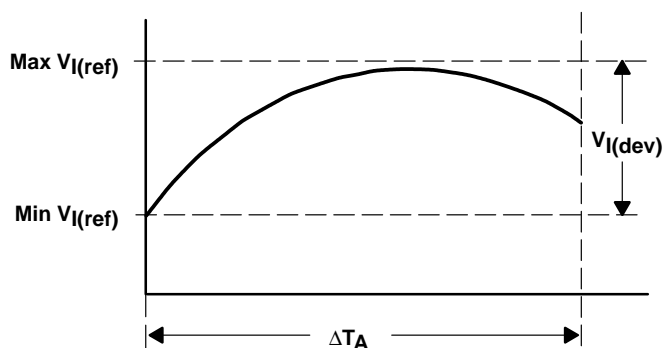

$\alpha_{V_{I(\text{ref})}}$ is positive or negative, depending on whether minimum $V_{I(\text{ref})}$ or maximum $V_{I(\text{ref})}$, respectively, occurs at the lower temperature.

§ The output impedance is defined as: $|z_{KA}| = \frac{\Delta V_{KA}}{\Delta I_{KA}}$

When the device is operating with two external resistors (see Figure 2), the total dynamic impedance of the circuit is given by: $|z'| = \frac{\Delta V}{\Delta I}$,

which is approximately equal to $|z_{KA}| \left(1 + \frac{R1}{R2} \right)$.

PARAMETER MEASUREMENT INFORMATION

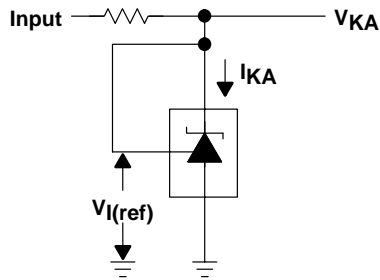


Figure 1. Test Circuit for $V_{(KA)} = V_{ref}$

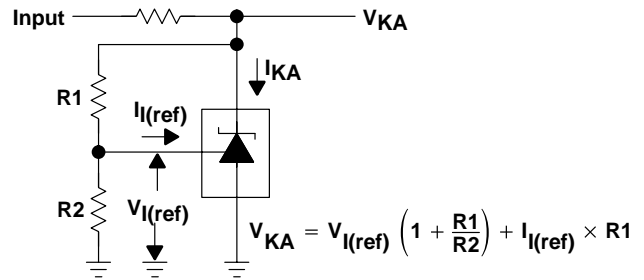


Figure 2. Test Circuit for $V_{(KA)} > V_{ref}$

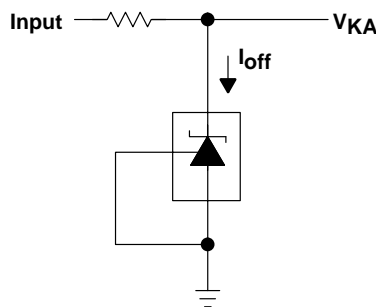


Figure 3. Test Circuit for I_{off}

TYPICAL CHARACTERISTICS





Table of Graphs

| | FIGURE |
|---|--------|
| Reference voltage vs Free-air temperature | 4 |
| Reference current vs Free-air temperature | 5 |
| Cathode current vs Cathode voltage | 6, 7 |
| Off-state cathode current vs Free-air temperature | 8 |
| Ratio of delta reference voltage to delta cathode voltage vs Free-air temperature | 9 |
| Equivalent input-noise voltage vs Frequency | 10 |
| Equivalent input-noise voltage over a 10-second period | 11 |
| Small-signal voltage amplification vs Frequency | 12 |
| Reference impedance vs Frequency | 13 |
| Pulse response | 14 |
| Stability boundary conditions | 15 |

TL1431 PRECISION PROGRAMMABLE REFERENCE

SLVS062H – DECEMBER 1991 – REVISED JANUARY 2002

TYPICAL CHARACTERISTICS†

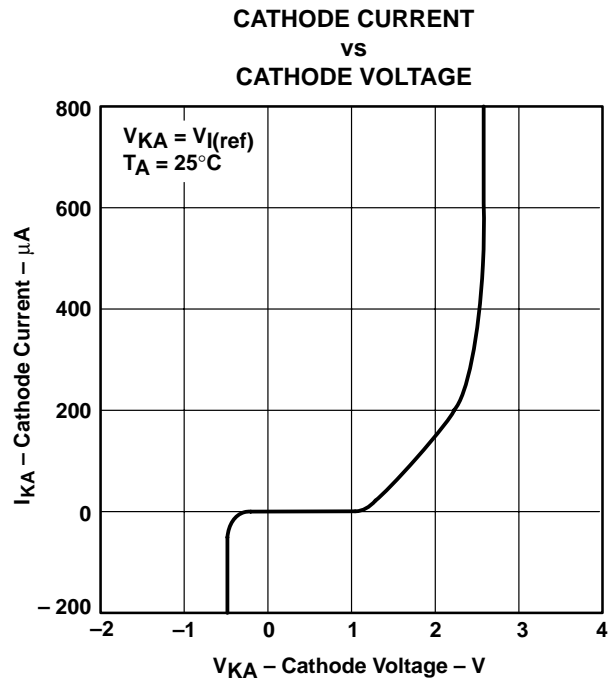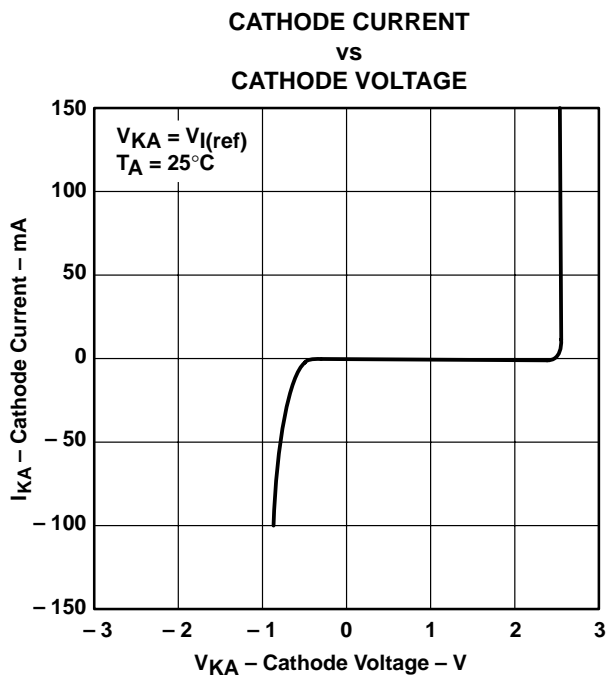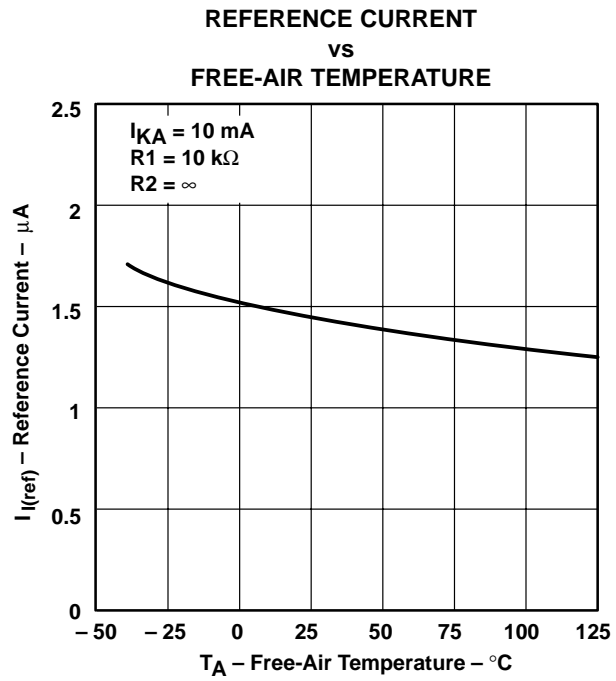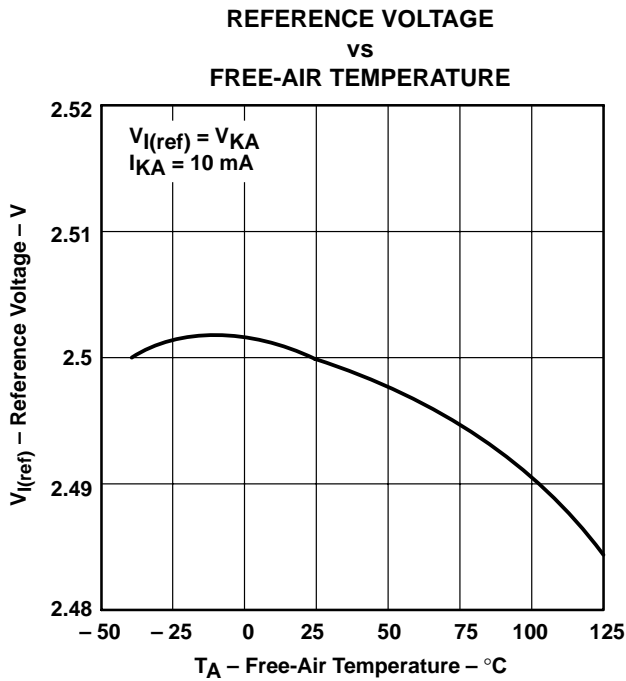

† Data at high and low temperatures are applicable only within the recommended operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS†

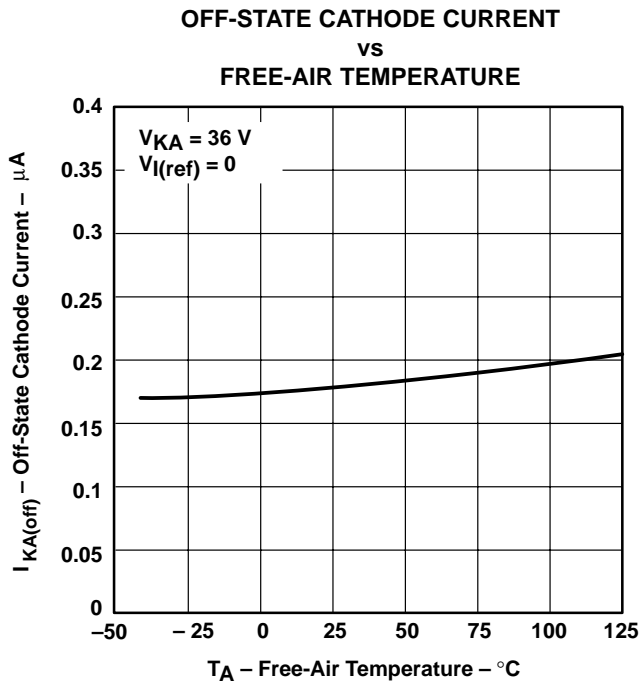


Figure 8

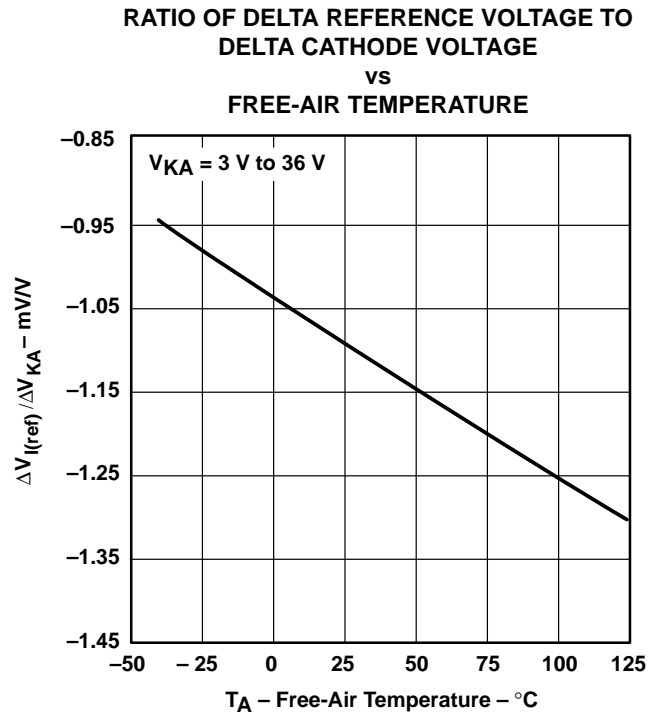


Figure 9

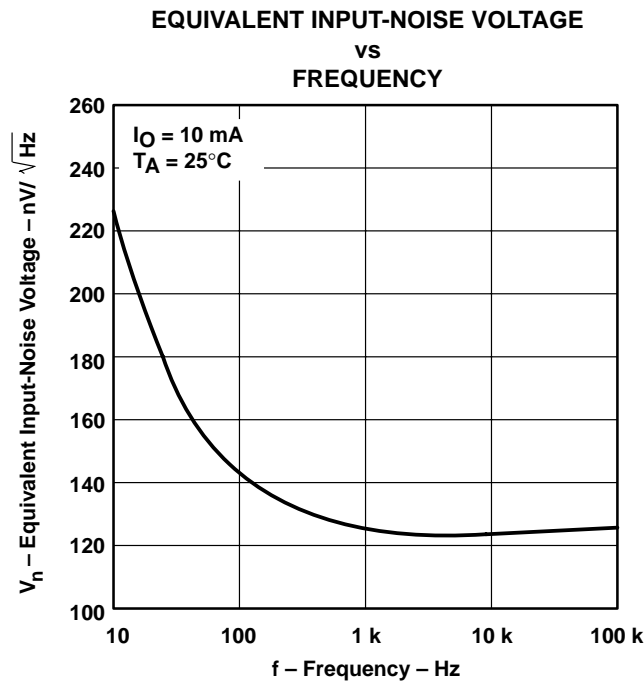


Figure 10



† Data at high and low temperatures are applicable only within the recommended operating free-air temperature ranges of the various devices.

TL1431 PRECISION PROGRAMMABLE REFERENCE

SLVS062H – DECEMBER 1991 – REVISED JANUARY 2002

TYPICAL CHARACTERISTICS

EQUIVALENT INPUT-NOISE VOLTAGE OVER A 10-SECOND PERIOD

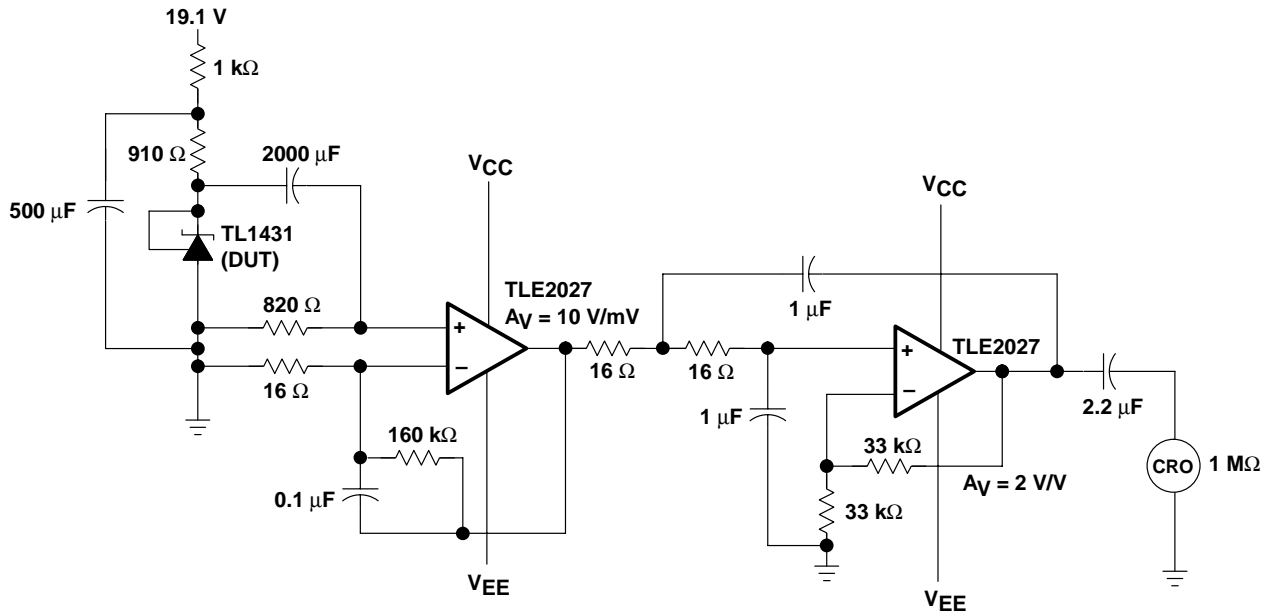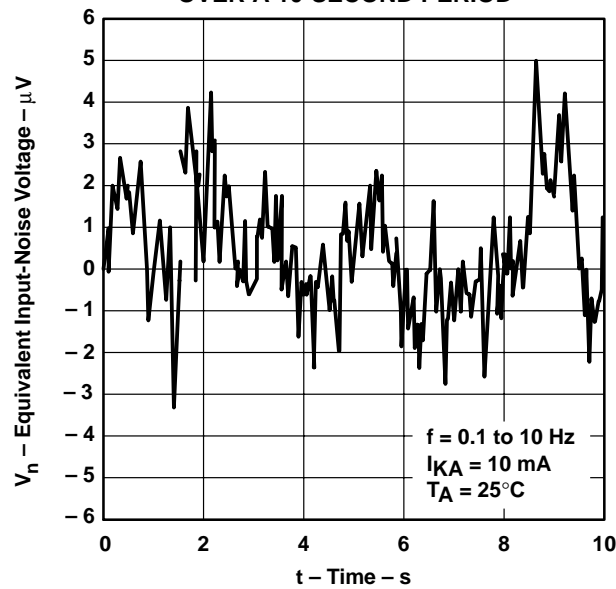

TEST CIRCUIT FOR 0.1-Hz TO 10-Hz EQUIVALENT INPUT-NOISE VOLTAGE

Figure 11

TYPICAL CHARACTERISTICS

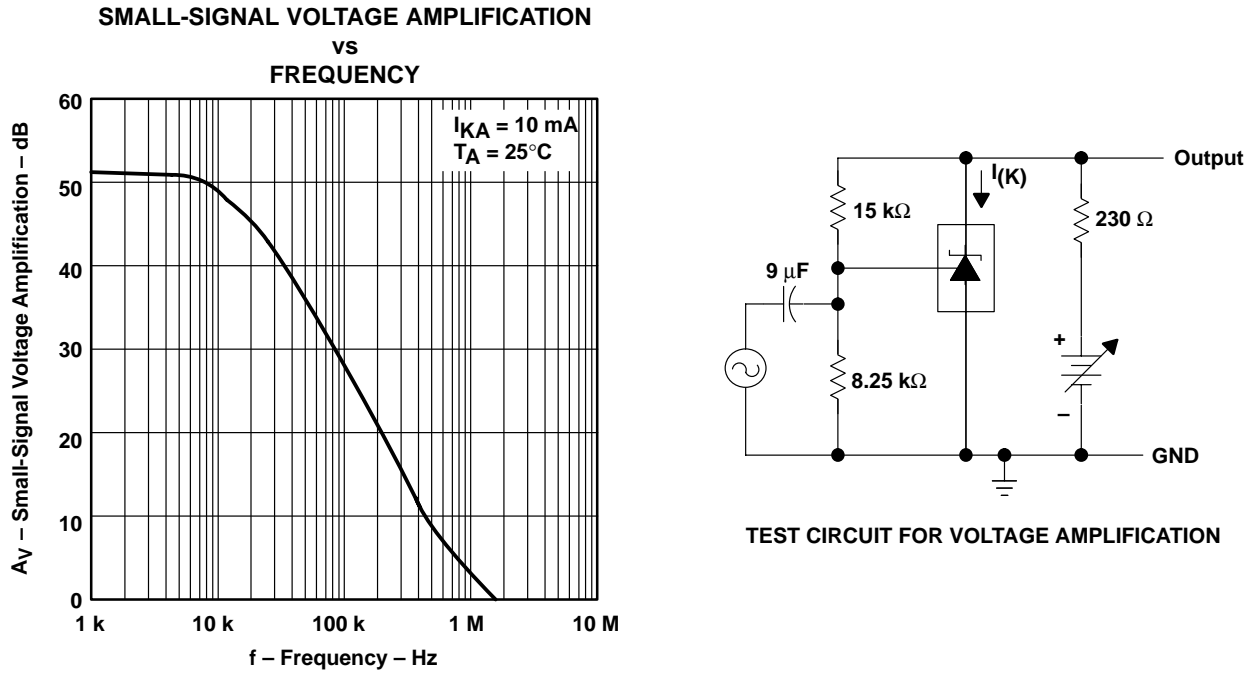


Figure 12

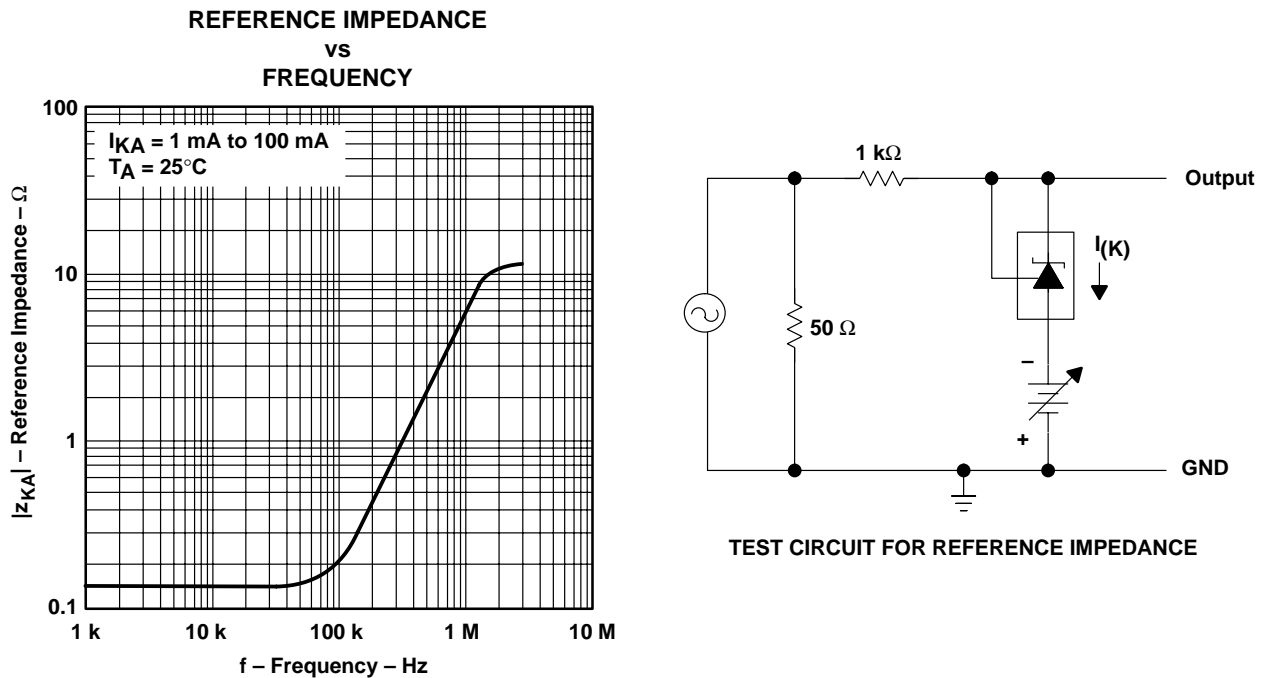


Figure 13

TYPICAL CHARACTERISTICS

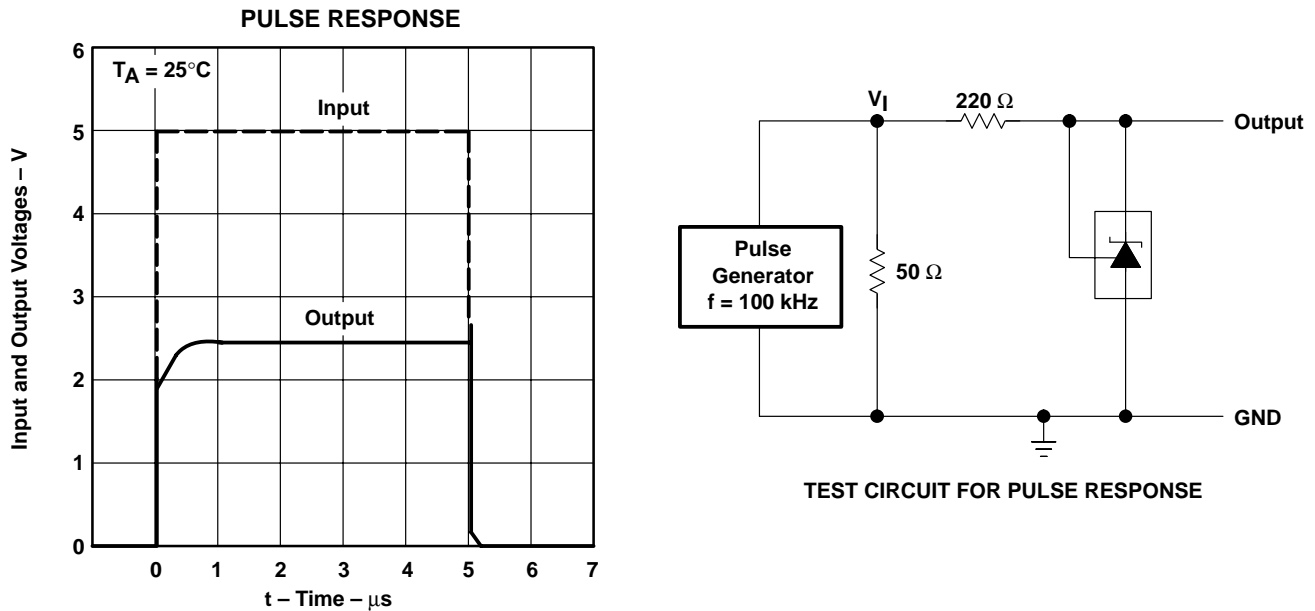


Figure 14


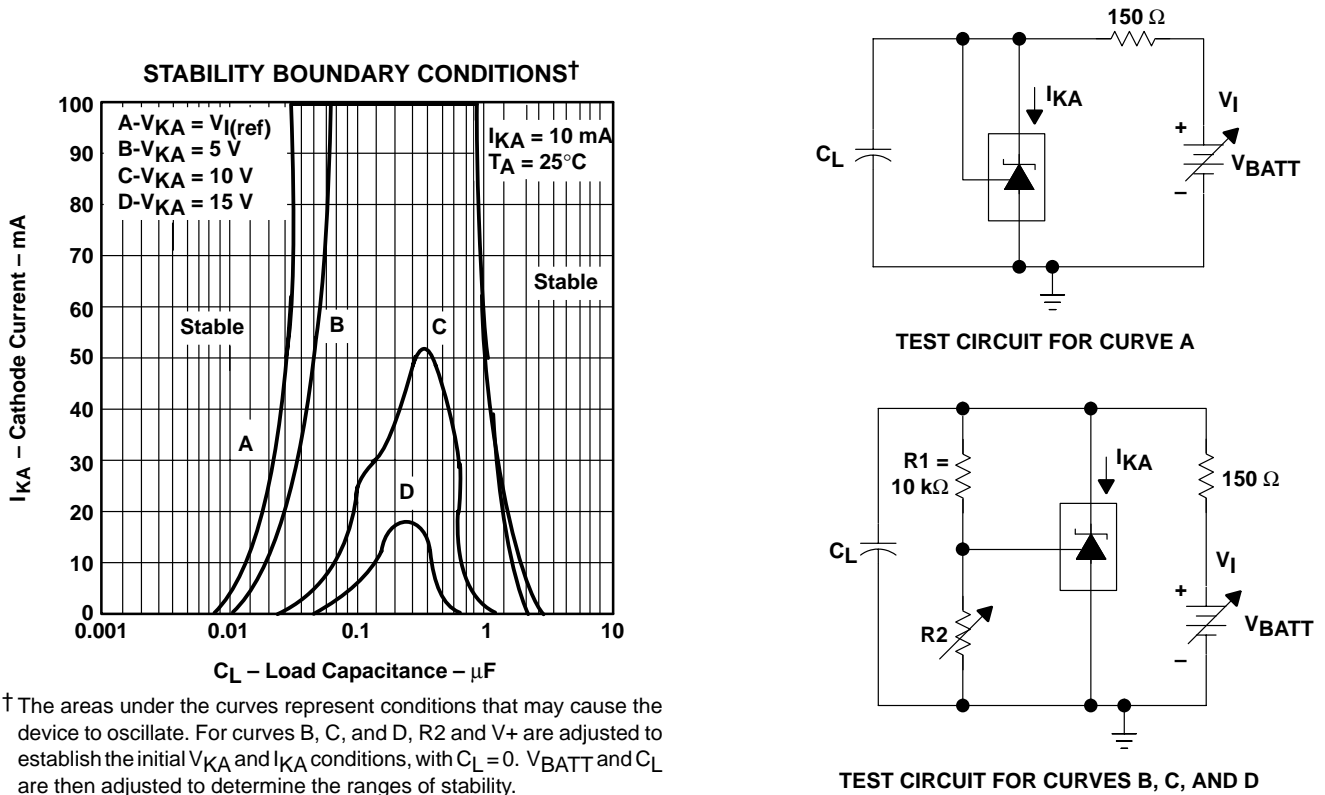


Figure 15

APPLICATION INFORMATION

Table of Application Circuits

| APPLICATION | FIGURE |
|---|--------|
| Shunt regulator | 16 |
| Single-supply comparator with temperature-compensated threshold | 17 |
| Precision high-current series regulator | 18 |
| Output control of a three-terminal fixed regulator | 19 |
| Higher-current shunt regulator | 20 |
| Crowbar | 21 |
| Precision 5-V, 1.5-A, 0.5% regulator | 22 |
| 5-V precision regulator | 23 |
| PWM converter with 0.5% reference | 24 |
| Voltage monitor | 25 |
| Delay timer | 26 |
| Precision current limiter | 27 |
| Precision constant-current sink | 28 |

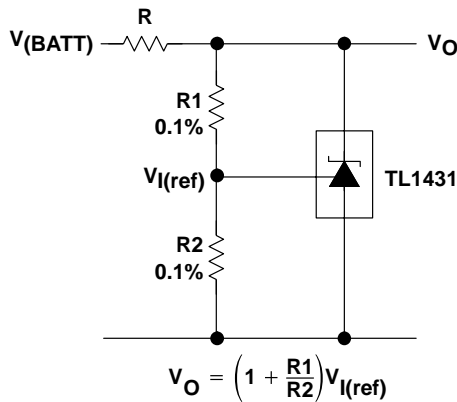

NOTE A: R should provide cathode current ≥ 1 mA to the TL1431 at minimum $V(BATT)$.

Figure 16. Shunt Regulator


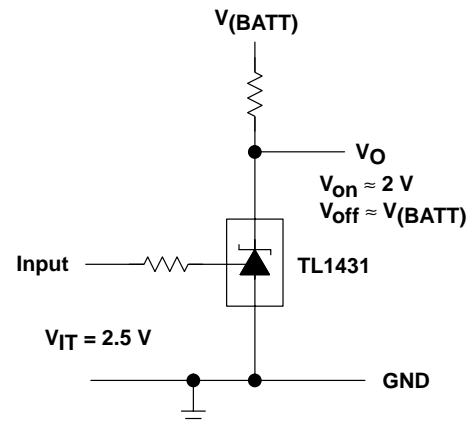


Figure 17. Single-Supply Comparator With Temperature-Compensated Threshold

TL1431 PRECISION PROGRAMMABLE REFERENCE

SLVS062H – DECEMBER 1991 – REVISED JANUARY 2002

APPLICATION INFORMATION

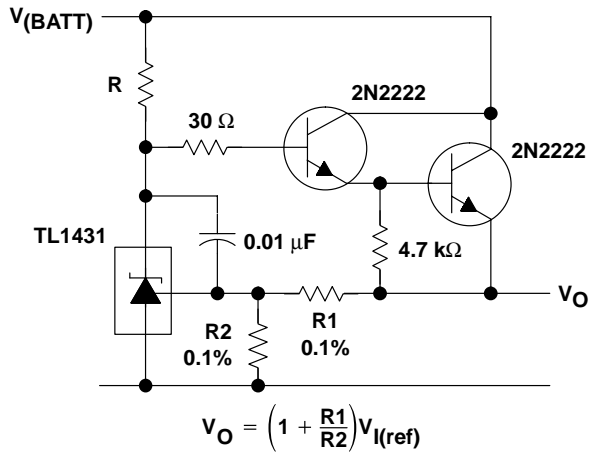

NOTE A: R should provide cathode current ≥ 1 mA to the TL1431 at minimum $V_{(BATT)}$.

Figure 18. Precision High-Current Series Regulator

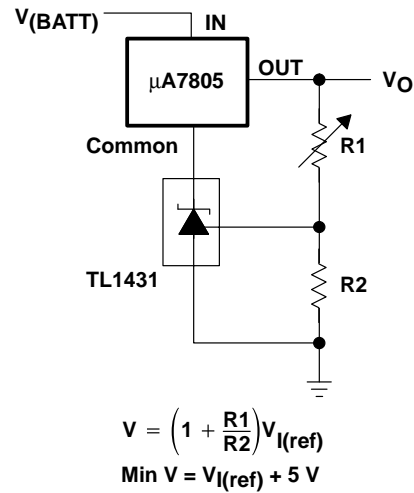


Figure 19. Output Control of a Three-Terminal Fixed Regulator


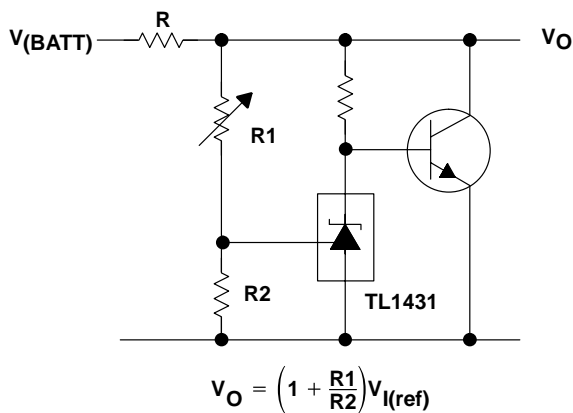


Figure 20. Higher-Current Shunt Regulator

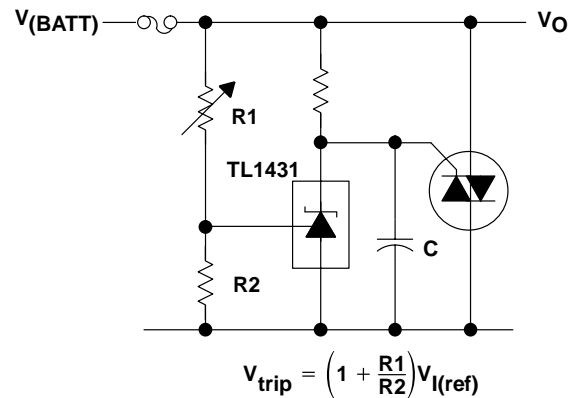

NOTE A: Refer to the stability boundary conditions in Figure 15 to determine allowable values for C.

Figure 21. Crowbar

APPLICATION INFORMATION


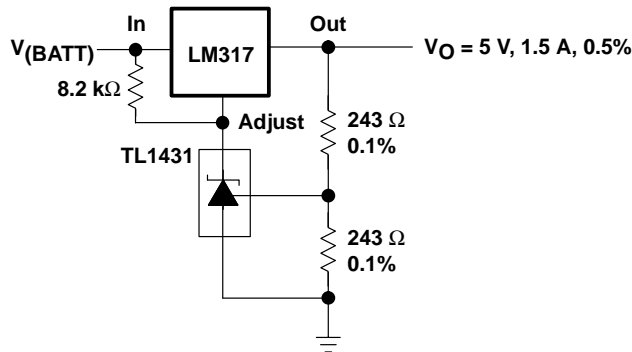


Figure 22. Precision 5-V, 1.5-A, 0.5% Regulator

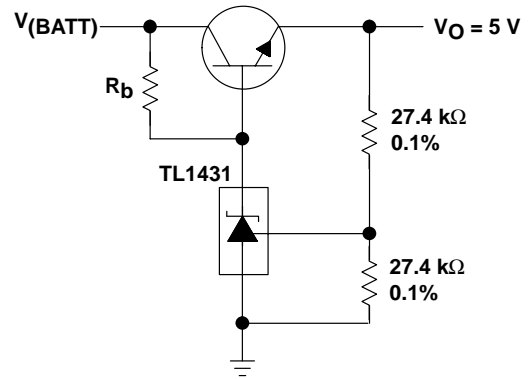

NOTE A: R_b should provide cathode current $\geq 1\text{ mA}$ to the TL1431.

Figure 23. 5-V Precision Regulator


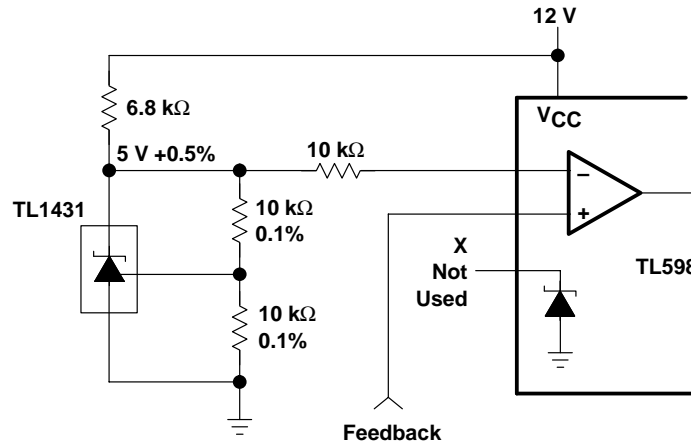


Figure 24. PWM Converter With 0.5% Reference

APPLICATION INFORMATION

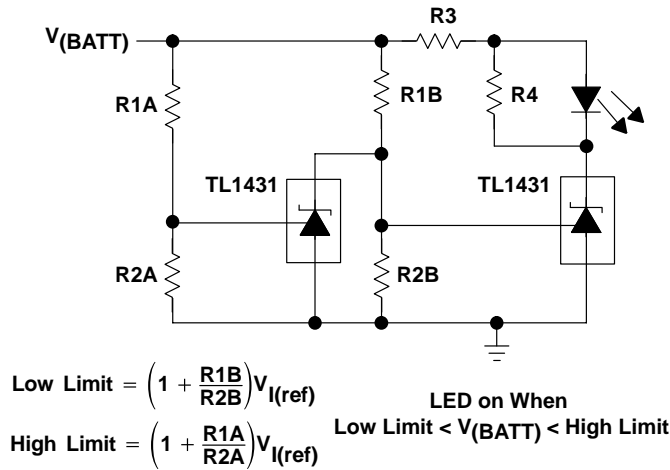

NOTE A: Select R3 and R4 to provide the desired LED intensity and cathode current ≥ 1 mA to the TL1431.

Figure 25. Voltage Monitor

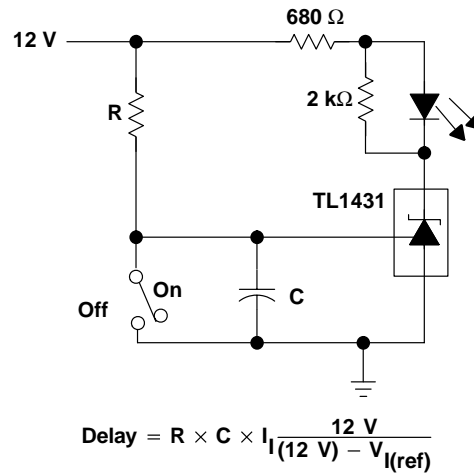


Figure 26. Delay Timer

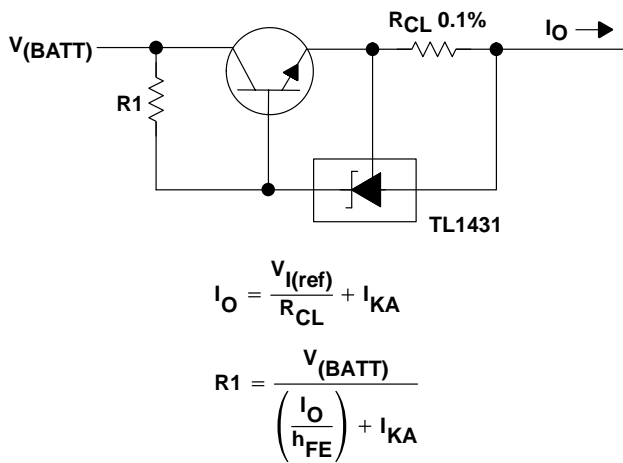


Figure 27. Precision Current Limiter

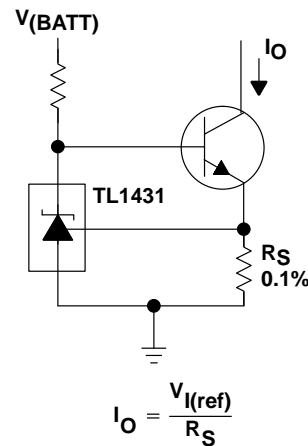


Figure 28. Precision Constant-Current Sink

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Mailing Address:

Texas Instruments
Post Office Box 655303
Dallas, Texas 75265