

Voltage Detector


BT75Axx

FUNCTIONS

- Detecting against error operations at the power ON/OFF
- Resetting function for low voltage microprocessor
- Checking low battery
- Active Low
- CMOS or open drain output (mask option)
- Tolerance $\pm 2\%$

FEATURES

- Low Power Consumption
- Low Temperature Coefficient
- Built-in Voltage Reference
- Comparator Hysteresis
- TO-92, SOT-23 packages are available

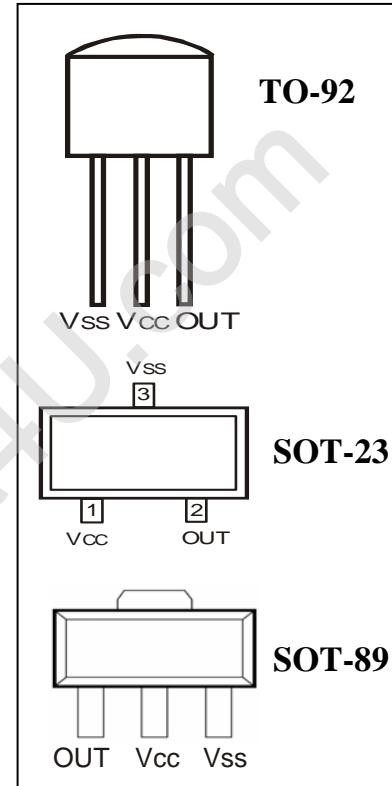

GENERAL DESCRIPTION



The BT75AXX series are the voltage detectors, consist of a high-precision voltage reference, a comparator with precise thresholds and built-in hysteresis and an output driver.

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$)

Characteristic	Symbol	Value	Unit
Supply Voltage	V_{CC}	-0.3 ~ +8.0	V
Operating Temperature	T_{opr}	-10 ~ +70	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 ~ +125	$^\circ\text{C}$
Output Current	I_O	30	mA

ELECTRICAL CHARACTERISTICS (T_A = 25°C, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Supply Voltage	V _{CC}		1.2		5.5	V
Detecting Voltage	V _{DET}		2.16	2.20	2.24	V
			2.35	2.40	2.45	
			2.50	2.55	2.60	
			2.65	2.70	2.75	
			2.74	2.80	2.86	
			3.23	3.30	3.37	
			3.82	3.90	3.98	
			4.12	4.20	4.28	
			4.61	4.70	4.79	
			4.90	5.00	5.10	
Supply Current	I _{CC}	V _{CC} = 5.0V, No Load		8	15	µA
Low Output Voltage	V _{OL}	V _{CC} = V _{DET} - 0.2V, I _{OL} = 0.1mA		0.1	0.3	V
High Output Voltage	V _{OH}	V _{CC} = V _{DET} + 0.2V, I _{OH} = 0.1mA	V _{CC} - 0.3V			V
Hysteresis Voltage	V _{HYS}			2.0		%
Detective Voltage Temperature Coefficient	$\frac{\Delta V_{DET}}{\Delta T \times \Delta V_{DET}}$	-10°C < T _A < 70°C		± 0.02		%/°C

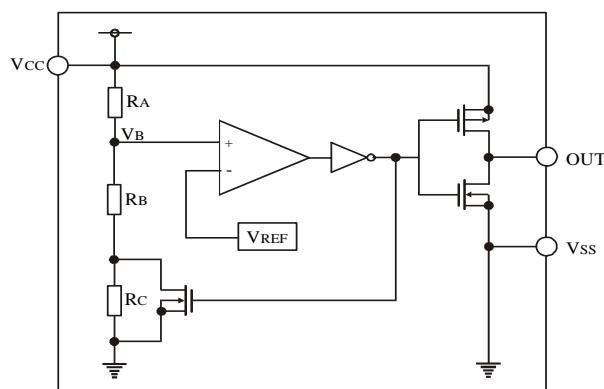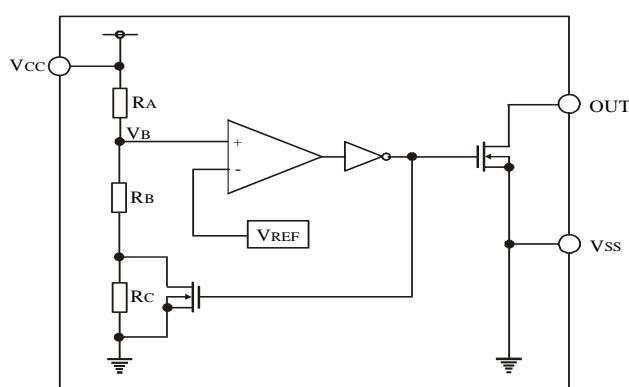BLOCK DIAGRAM**CMOS OUTPUT****OPEN DRAIN OUTPUT****FUNCTIONAL DESCRIPTION**

The BT75AXX series is the set of voltage detectors equipped with a high stability voltage reference which is connected to the negative input of a comparator - denoted as V_{REF} in block diagram.

When the voltage drop to the positive input of the comparator (V_B) is high than V_{REF}, V_{OUT} goes high.

If V_{CC} is decreased so that V_B falls to a value less than V_{REF}, the comparator output inverts from high to low, V_{OUT} goes low.

The device has hysteresis to prevent the circuit from oscillation when V_B ≈ V_{REF}.

If V_{CC} falls below the minimum operating voltage, the output becomes undefined.

The detectable voltage is defined as:

$$V_{DET}(-) = \frac{RA+RB+RC}{RB+RC} \times V_{REF}$$

The release voltage is defined as:


$$V_{DET}(+) = \frac{RA+RB}{RB} \times V_{REF}$$

The hysteresis width is:


$$V_{HYS} = V_{DET}(+) - V_{DET}(-)$$

ELECTRICAL CHARACTERISTICS


**1. OUTPUT VOLTAGE vs. SUPPLY VOLTAGE
BT75A25**

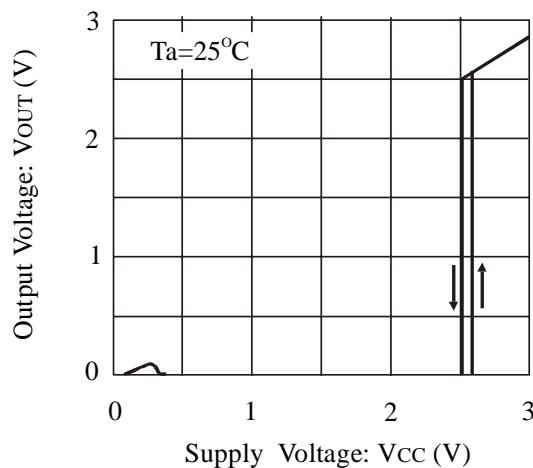


**2. OUTPUT LOW CURRENT vs. SUPPLY VOLTAGE
BT75A25**

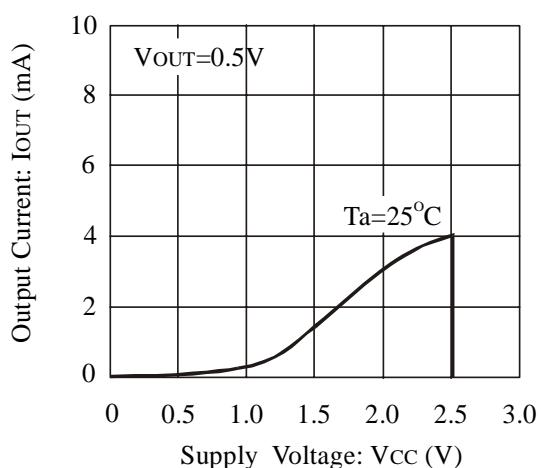


3. NORMALIZED V_{OL} vs. TEMPERATURE

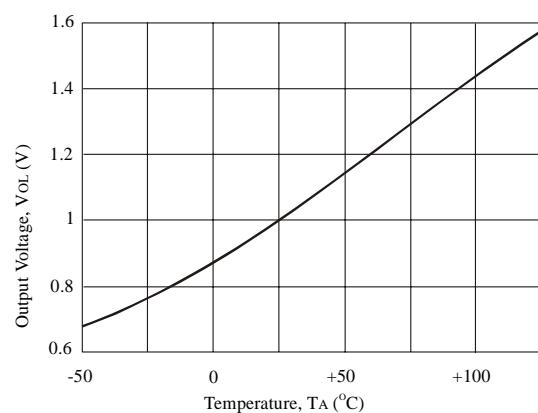


NORMALIZED V_{OH} vs. TEMPERATURE




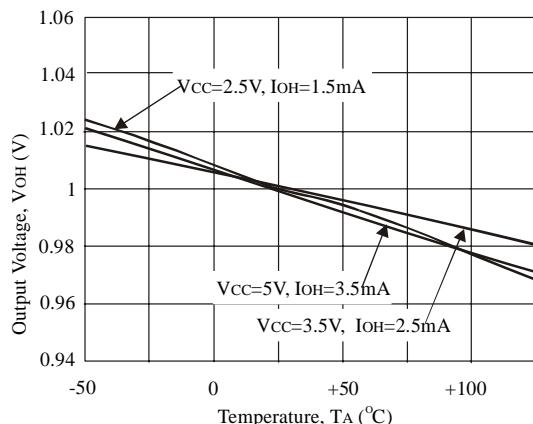


4. V_{OL} vs. OUTPUT CURRENT

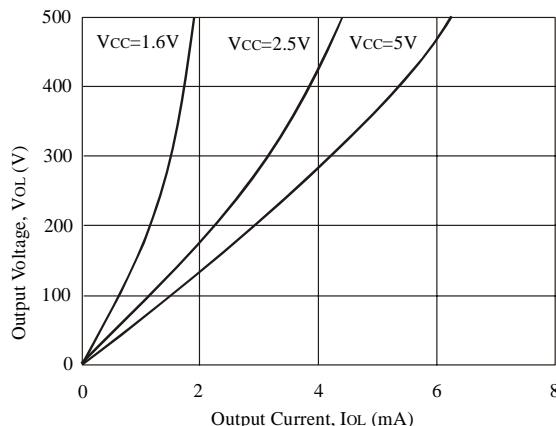

$V_{CC} - V_{OH}$ vs. OUTPUT CURRENT

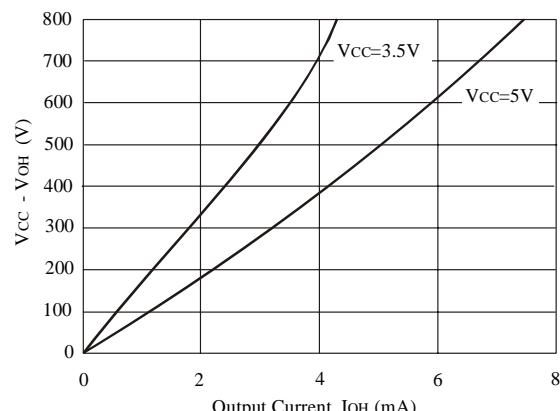

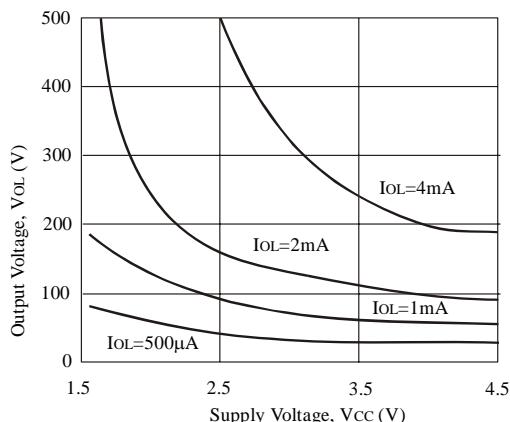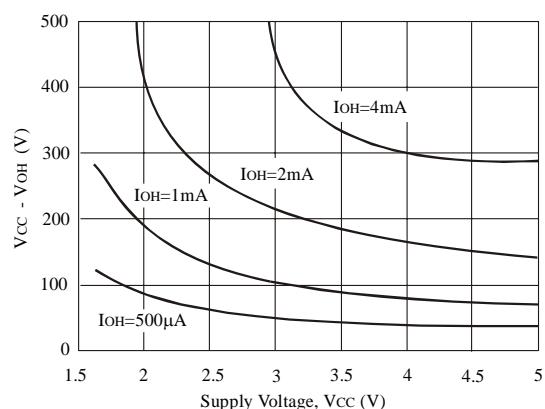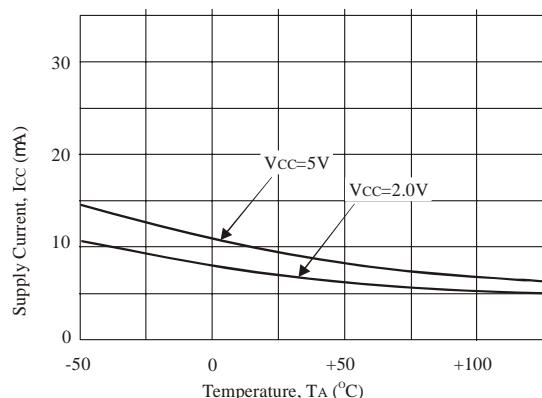
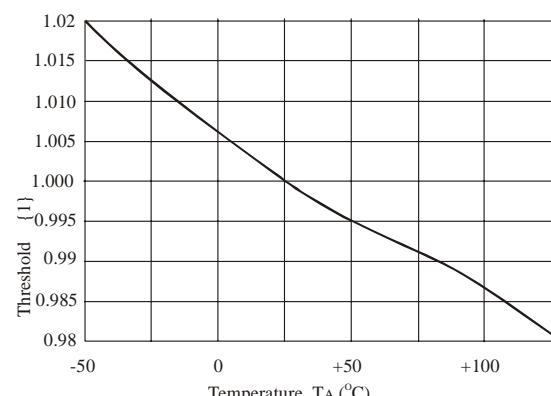
5. V_{OL} vs. SUPPLY VOLTAGE**V_{CC} - V_{OH} vs. SUPPLY VOLTAGE****6. SUPPLY CURRENT vs. TEMPERATURE****NORMALIZED THRESHOLD vs. TEMPERATURE****ORDERING INFORMATION****BT75A XX XX**

- 22 -> 2.20V
- 24 -> 2.40V
- 25 -> 2.55V
- .
- .
- 42 -> 4.20V
- 47 -> 4.70V
- 50 -> 5.00V


- LS = TO-92 Straight (Bulk)
- LF = TO-92 Form (Taping)
- ST = SOT-23 (Taping)
- PT = SOT-23 (Taping)

PACKAGE DIMENSIONS

TO-92

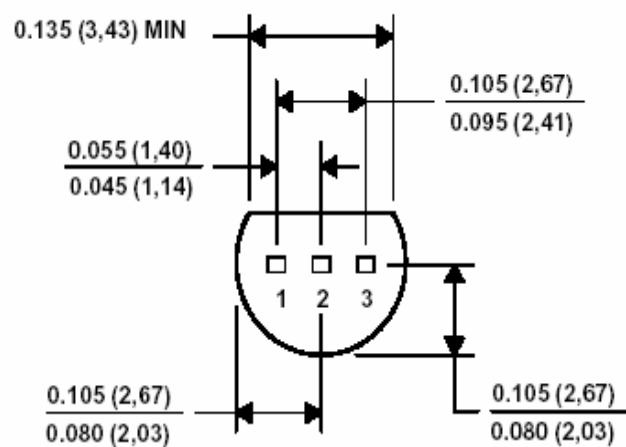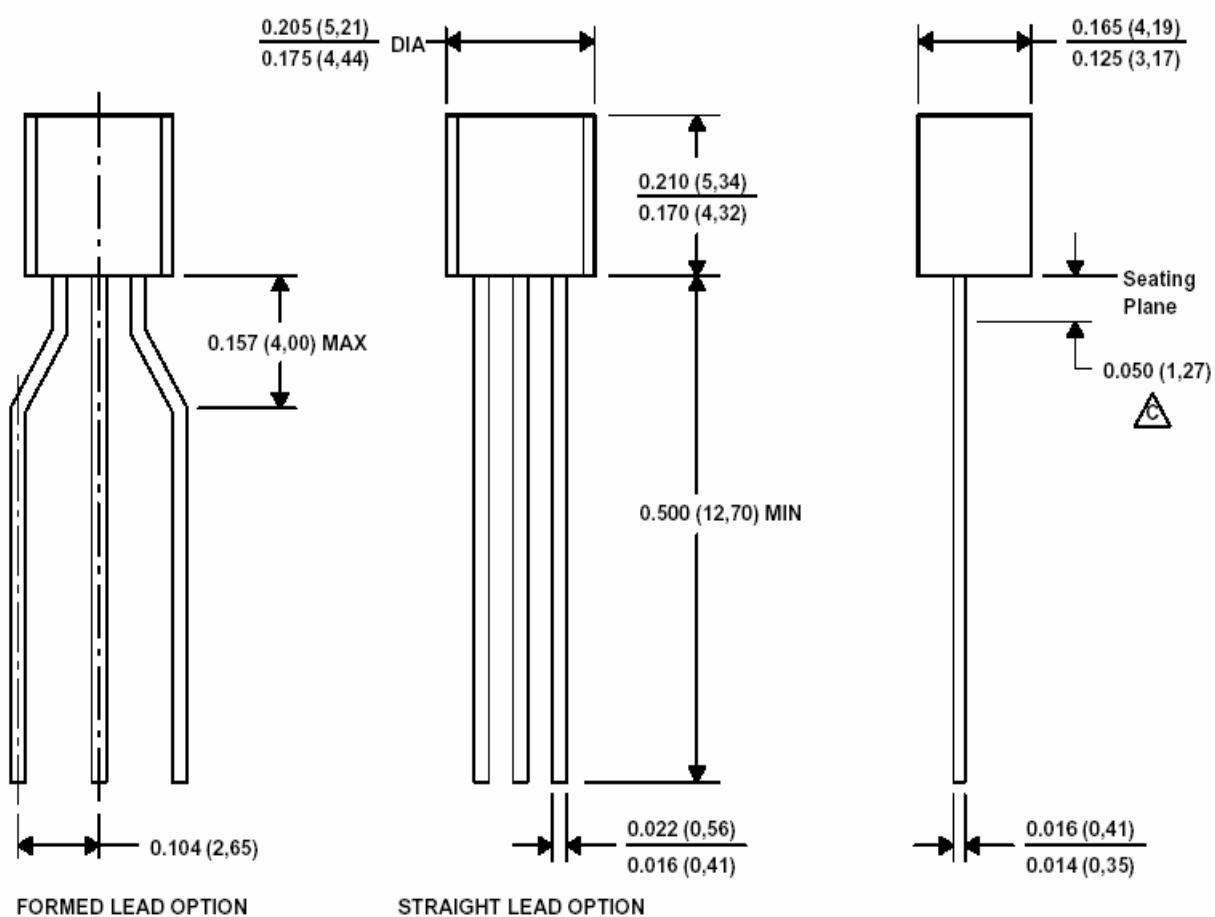


SOT-23 PACKAGE OUTLINE DIMENSIONS

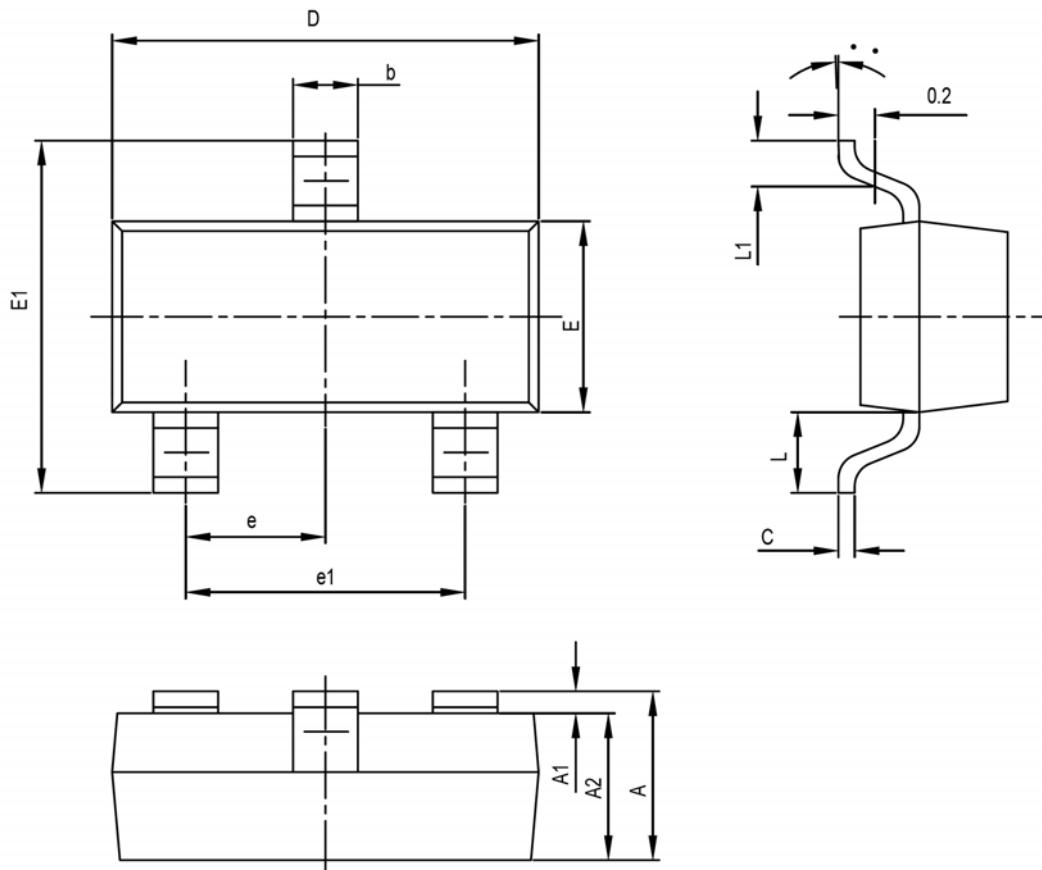

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950TPY		0.037TPY	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT-89-3L PACKAGE OUTLINE DIMENSIONS

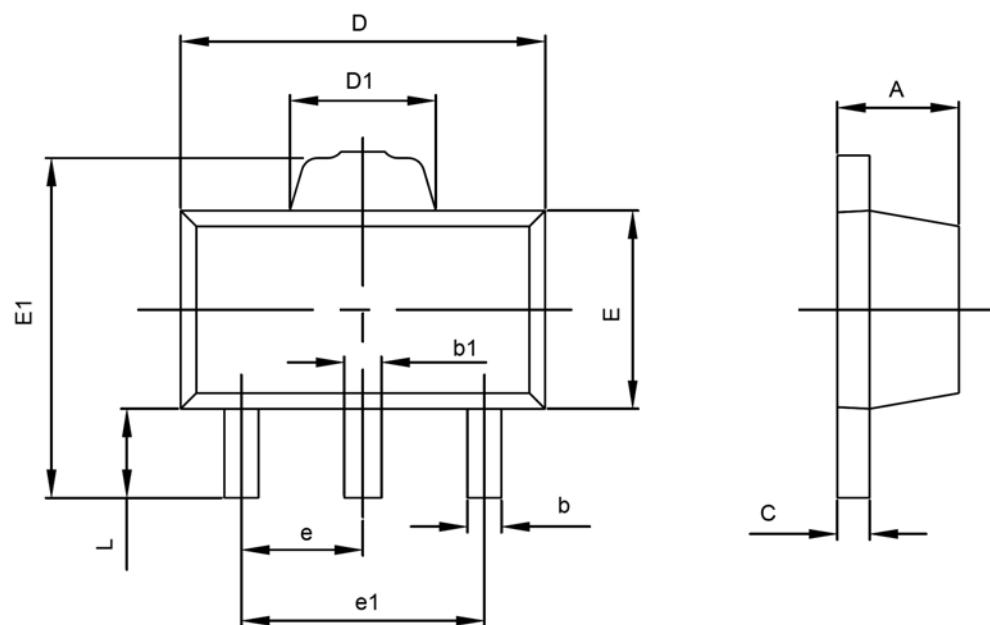

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.360	0.560	0.014	0.022
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.400	1.800	0.055	0.071
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500TYP		0.060TYP	
e1	2.900	3.100	0.114	0.122
L	0.900	1.100	0.035	0.043