


OMEGA® Thin Film DIN Class “A” RTD Elements

- ✓ DIN Class “A” Accuracy
- ✓ Various Sizes Available
- ✓ Resistance Range from 100 to 1000 Ω at 0°C

Series F: Series F elements are small, flat, thin film elements with 0.2 mm (0.008") diameter by 10 mm (0.4") long lead wires. They can be used between -70 and 600°C (-94 to 1112°F) and are available in 100.00 ±0.06, 500.00 ±0.30, and 1000.00 ±0.60 Ω at 0°C. Their resistance vs. temperature characteristics conform to IEC751, and they have a temperature coefficient of resistance between 0 and 100°C of 0.00385 Ω/Ω/°C. See page Z-249 in the technical section for a resistance vs. temperature curve and equations.

OMEGA thin film RTDs can be used as is with various OMEGA controllers and instruments, or in an unlimited number of housings

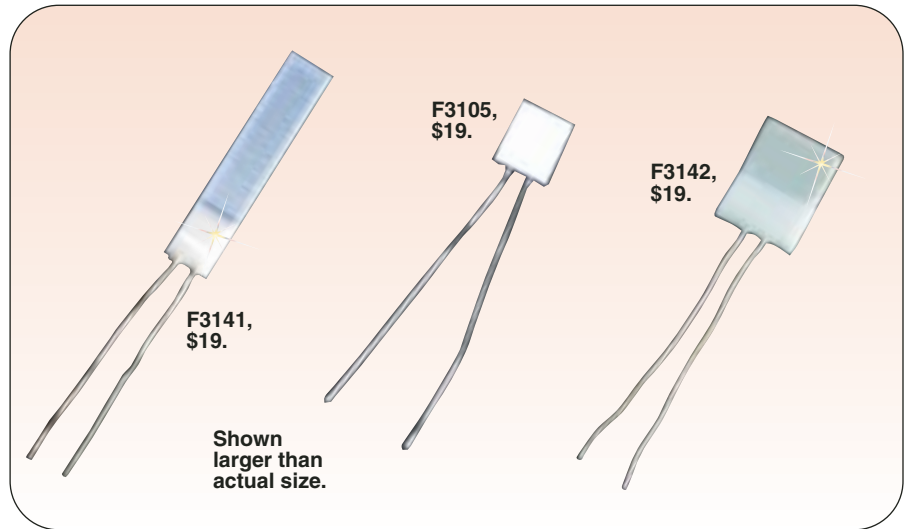

and package styles to meet user needs. Speak to one of our Applications Engineers for custom assemblies or application assistance.

Discount Schedule	
1 to 10 unitsNet
11 to 24 units10%
25 to 49 units15%
50 to 99 units20%
100 units and up25%

OMEGAFILM® – Platinum RTD Elements (Alpha = 0.00385)

MOST POPULAR MODELS HIGHLIGHTED!

Series	10 mm Lead Length Dimensions in Millimeters (1 mm = 0.03937")	Single or Dual	Nominal Resistance (Ω)	Temperature Range	Model Number	Price	
F		1	x	100	↑ -70 to 600°C (-94 to 1112°F) ↓	F3101	\$19
		1	x	500		F3131	19
		1	x	1000		F3141	19
F		1	x	100		F3102	\$19
		1	x	500		F3132	19
F		1	x	1000		F3142	\$19
F		1	x	100	F3105	\$19	
F		1	x	100	F3107	\$19	

Ordering Examples: **F3101**, 1 x 100 platinum RTD element, \$19.
F3105, 1 x 100 platinum RTD element, \$19.

OMEGA® Thin Film RTD Elements

"W" Series Starts at \$32

W2112, \$36

W2102, \$36

W2204, \$64

All RTD elements available with PFA insulated lead wire.
 †Pricing is dependent on lead style (see page C-30).

Shown larger than actual size

Series W: Series W elements are rugged, cylindrical platinum thin film ceramic elements that can be used at temperatures between -50 and 600°C (-58 to 1112°F). These elements have a 0.38 mm (0.015") diameter and gold-palladium leads approximately 10 mm (0.4") long which are strain relieved in the ceramic body. Series W elements include single and dual element configurations with resistances at 0°C of 100, 200, 400, 500, 1000, and 2000 Ω. The resistance vs. temperature characteristics of these elements conforms to IEC751, with a tolerance of ±0.1% at 0°C, placing their accuracy between the Class A and Class B requirements. The resistance vs. temperature table and calculation equations can be found on page Z-249 in the technical section.

OMEGAFILM RTDs can be used as-is with various OMEGA controllers and instruments, or packaged into an unlimited number of housings and package styles to meet your measurement and control needs.

Discount Schedule	
1 to 10 unitsNet
11 to 24 units10%
25 to 49 units15%
50 to 99 units20%
100 units and up25%

OMEGAFILM®—Platinum RTD Elements (Alpha = 0.00385)

MOST POPULAR MODELS HIGHLIGHTED!

Series	15 mm Lead Length Dimensions in millimeters (1 mm = 0.03937")	Single or Dual	Nominal Resistance (Ω)	Temperature Range	Model Number	Price	
W		1	x	100	↑ -50 to 600°C (-58 to 1112°F) ↓	W2102	\$32
		1	x	200		W2112	35
		1	x	500		W2132	39
		1	x	1000		W2142	48
		1	x	2000		W2152	97
W		2	x	100		W2202	58
		2	x	200		W2212	68
		2	x	400		W2222	66
		2	x	500		W2232	61
		2	x	1000		W2242	71
W		1	x	100	W2103	36	
		2	x	100	W2204	64	
WS		1	x	100	-50 to 850°C (-60 to 1560°F)	WS81	120

* Length is 17 mm for 1000 and 2000 Ω elements.

Ordering Example: W2103, 1 x 100 Ω, 2 mm dia. platinum RTD element, \$36.



UNITED STATES

www.omega.com
1-800-TC-OMEGA
Stamford, CT.

CANADA

www.omega.ca
Laval(Quebec)
1-800-TC-OMEGA

GERMANY

www.omega.de
Deckenpfronn, Germany
0800-8266342

UNITED KINGDOM

www.omega.co.uk
Manchester, England
0800-488-488

FRANCE

www.omega.fr
Guyancourt, France
088-466-342

CZECH REPUBLIC

www.omegaeng.cz
Karviná, Czech Republic
596-311-899

BENELUX

www.omega.nl
Amstelveen, NL
0800-099-33-44



More than 100,000 Products Available!

• Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Glass Bulb Thermometers, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders Relative Humidity Measurement Instruments, RTD Probes, Elements and Assemblies, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples Thermowells and Head and Well Assemblies, Transmitters, Wire

• Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

• pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

• Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

• Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Strain Gages, Torque Transducers, Valves

• Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters