

## 2N3905

## PNP EPITAXIAL SILICON TRANSISTOR

T-29-21

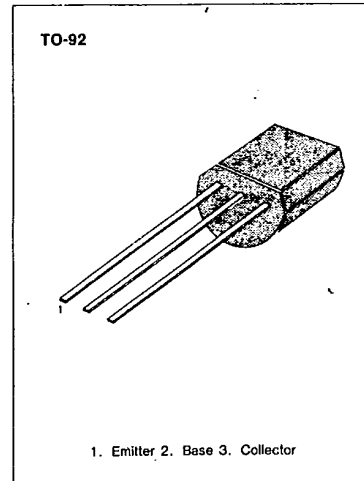
## GENERAL PURPOSE TRANSISTOR

- Collector-Emitter Voltage:  $V_{CE0} = 40V$
- Collector Dissipation:  $P_C (\text{max}) = 625mW$

ABSOLUTE MAXIMUM RATINGS ( $T_a = 25^\circ C$ )

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	$V_{CBO}$	40	V
Collector-Emitter Voltage	$V_{CEO}$	40	V
Emitter-Base Voltage	$V_{EBO}$	5	V
Collector Current	$I_C$	200	mA
Collector Dissipation	$P_C$	625	mW
Junction Temperature	$T_J$	150	$^\circ C$
Storage Temperature	$T_{stg}$	-55 ~ 150	$^\circ C$

- Refer to 2N3906 for graphs

ELECTRICAL CHARACTERISTICS ( $T_a = 25^\circ C$ )

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector-Base Breakdown Voltage	$BV_{CBO}$	$I_C = 10\mu A, I_E = 0$	40			V
*Collector-Emitter Breakdown Voltage	$BV_{CEO}$	$I_C = 1mA, I_B = 0$	40			V
Emitter-Base Breakdown Voltage	$BV_{EBO}$	$I_E = 10\mu A, I_C = 0$	5			V
Base Cut-off Current	$I_{BL}$	$V_{CE} = 30V, V_{BE} = 3V$			50	nA
Collector Cut-off Current	$I_{CEX}$	$V_{CE} = 30V, V_{BE} = 3V$			50	nA
*DC Current Gain	$h_{FE}$	$I_C = 0.1mA, V_{CE} = 1V$	30			
		$I_C = 1mA, V_{CE} = 1V$	40			
		$I_C = 10mA, V_{CE} = 1V$	50		150	
		$I_C = 50mA, V_{CE} = 1V$	30			
		$I_C = 100mA, V_{CE} = 1V$	15			
*Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 10mA, I_B = 1mA$			0.25	V
		$I_C = 50mA, I_B = 5mA$			0.4	V
*Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 10mA, I_B = 1mA$	0.65		0.85	V
		$I_C = 50mA, I_B = 5mA$			0.95	V
Current Gain Bandwidth Product	$f_T$	$I_C = 10mA, V_{CE} = 20V$ $f = 100MHz$	200			MHz
Output Capacitance	$C_{ob}$	$V_{CB} = 5V, I_E = 0$ $f = 100KHz$			4.5	pF
Turn On Time	$t_{on}$	$V_{CC} = 3V, V_{BE} = 0.5V$ $I_C = 10mA, I_{B1} = 1mA$			70	ns
Turn Off Time	$t_{off}$	$V_{CC} = 3V, I_C = 10mA$ $I_B = I_{B2} = 1mA$			260	ns

- Pulse Width  $\leq 300\mu s$ , Duty Cycle  $\leq 2\%$



This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.